


THIS DRAWING IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

DRG No
BL/D5413/01-08 INST
USED ON ---


THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED


DO NOT SCALE - ASK



HUMIDITY INDICATOR
SEE TABLE BELOW




FOR PRINTING DETAIL,
SEE DATA TO THE RIGHT

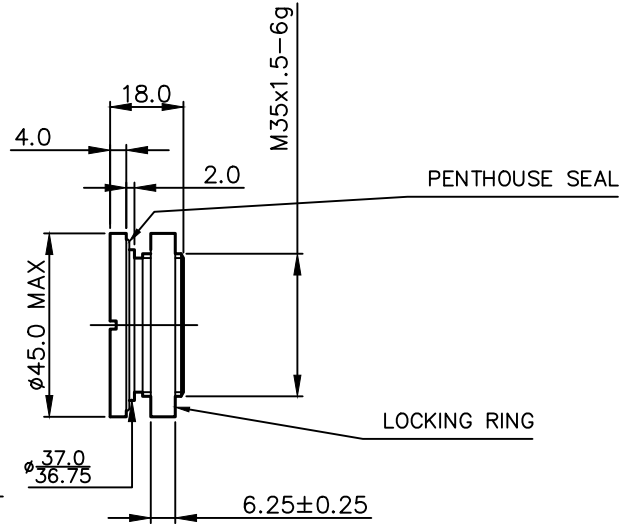


PRINT DETAIL

BL/D5413/01-04



BL/D5413/05



BL/D5413/06-08
NO PRINT

DRAWING No.	INDICATOR LEVELS AT 25°C	NSN	NOTES
BL/D5413/01	20% RH		
BL/D5413/02	50% RH		
BL/D5413/03	15 & 30% RH		
BL/D5413/04	10, 20, 30, & 40% RH		
BL/D5413/05	20, 30, 40, & 50% RH	6685-99-147-0368	
BL/D5413/06	30, 40, & 50% RH		
BL/D5413/07	30, 40, & 50% RH		NO LOCKING RING
BL/D5413/08	30 & 50% RH		

NOTE : HUMIDITY INDICATOR CONFORMS TO DEF STAN 66-14

/08 ADDED	7218	I	10/09/20
PRINT DETAIL	6981	H	26/01/18
IND. EXAMPLE DETAIL	6964	G	01/01/18
DRG No. CHANGED	6557	F	24/01/14
/07 ADDED	6154	E	02/06/05
/06 WAS 20 ETC	6126	D	23/11/04
REDRAWN	6122	C	28/10/04
CHANGE	MOD No	ISSUE	DATE

MATERIAL ALUMINIUM ALLOY	PROTECTIVE FINISH ANODISED & DYED BLACK	TOLERANCES ±0.5		TITLE HUMIDITY INDICATOR	DRAWN SKS	CHECKED
		DIMENSIONS IN in/mm	MM			
EST. WT.		SURFACE ROUGHNESS			DRAWING NUMBER BL/D5413/01-08 INST	
		SCALE (ORIGINAL)		N.T.S		