

DRG. No.



BL/D 7958 INST

USED ON

THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

DONOTSCALE-ASK.

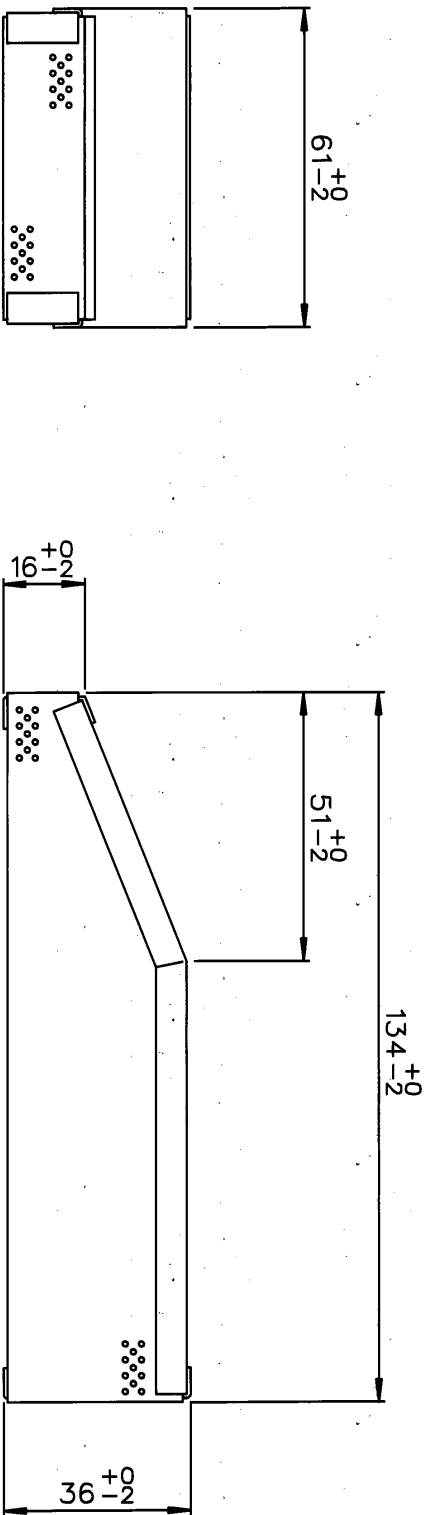

NOTES

1. MATERIAL: 22 SWG PERFORATED ALUM ALLOY SHEET.
HOLE DIA 0.7 TO 1.2 - OPEN AREA 25% TO 35%.
2. PROTECTIVE FINISH: ANODISED & DYED LIGHT METALLIC BLUE.
3. FILLED WITH MOLECULAR SIEVES DESICCANT, GRADE 4A,
1/16" PELLETS (USA SOURCED).
4. PACKAGING: WRAPPED IN KRAFT PAPER, PACKED WITH INDICATOR DISC IN
POLYETHYLENE ENVELOPE & HEAT SEALED. OVER PACKED IN METAL FOIL
LAMINATE ENVELOPE & HEAT SEALED. OUTER PACKING: FIBREBOARD CARTON.
5. DESICCATOR IS CAPABLE OF WITHSTANDING 250 °C FOR 8 HOURS.

MATERIAL

SEE NOTE 1

PROTECTIVE
TREATMENT

SEE NOTE 2

TOLERANCES
UNLESS
STATED

AS STATED

TITLE

BROWNELL LTD. LONDON, N.W.10.
DESICCANT CONTAINER
DEHUMIDIFIER (STATIC)

CUSTOMERS REF.

DRAWING No.

CHANGE	MOD. No.	ISSUE	DATE
		A	2/9/98

DRAWN
LJ

CHECKED

EST. WT. -

DIMENS. IN ~~mm~~ / (in./mm.)

SCALE (ORIGINAL) 1 : 1

BL/D 7958 INST

WJG:CBM