


DRG No  
BL/D 9973 INST

REMOVE ALL SHARP EDGES  
UNLESS SPECIFIED

DO NOT SCALE - ASK

USED ON

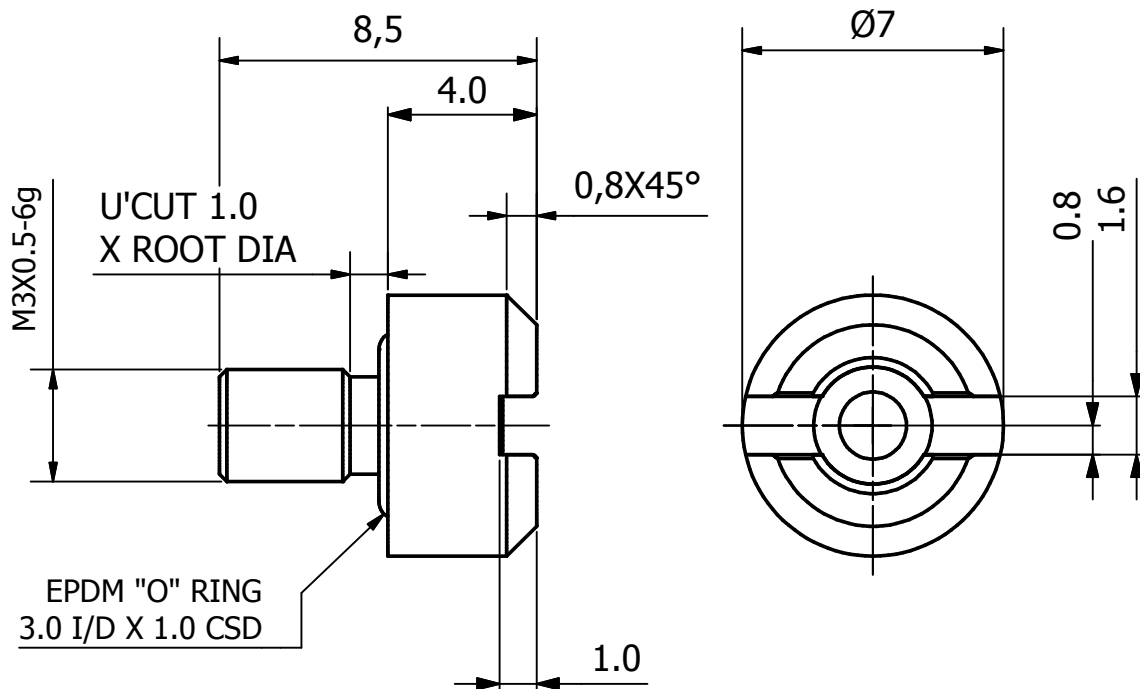



NOTES:

1. OPERATING TEMPERATURE RANGE: -40°C TO +75°C.  
STORAGE TEMPERATURE RANGE: -50°C TO +85°C.  
HUMIDITY: 0 TO 100%.  
IMMERSION: DEPTH 1 METRE FOR A DURATION OF 2 HOURS.

2. MEMBRANE MATERIAL: MODIFIED ACRYLIC COPOLYMER CAST ON A NONWOVEN POLYESTER SUPPORT. POST TREATED FOR HYROPHOBICITY THROUGH UV/E BEAM POLYMERIZATION.

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD, AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

MATERIAL	PROTECTIVE FINISH				
STAINLESS STEEL TO BS970 PT 1 303S31	NATURAL (CLEAN FINISH)	EXTERNAL CHAMFER ADJUSTED TO 0.8mm	6316	3	10/07/09
		OUTER AND INNER CHAMFER CHANGED TO 0.1mmx45°	6309	2	22/05/08
		ORIGINAL		1	22/03/07
EST. WT.	-	THIRD ANGLE PROJECTION	CHANGE	MOD No	ISSUE DATE
DIMS IN	mm	SURFACE TEXTURE	TOLERANCES : UNLESS OTHERWISE STATED	+/- 0.1	
SCALE	5:1	-			
 RED DOT = ORIGINAL  BLACK DOT = COPY	<b>BROWNELL LTD</b>		DRAWN	CHECKED	
	LONDON NW10 7XF		JB		
TITLE			DRAWING No.		
MINI BREATHER			BL/D 9973 INST		